

Commercial Unit Coolers



- Optimised 3/8" Rifle Bore Tube Coils
- Light Weight Alu Case - 'Signal White' Powder Coat
- High Airflow External Rotor Motors
- Turbo Heat Exchangers
- Water Defrost - Fully Serviceable

RW SERIES

3 25 kW


MEDIUM TEMP

MODELS	RMW	40	50	60	90	105	125	120	145	165	180	215	245
Capacity	R404A	4.20	5.13	5.94	8.97	10.77	12.27	12.03	14.52	16.56	18.06	21.75	24.84
kW @ 6 KTD	R407F	4.41	5.40	6.24	9.42	11.31	12.87	12.63	15.24	17.37	18.96	22.83	26.07
-4°C SST	R22	4.11	5.01	5.82	8.76	10.50	12.00	11.76	14.22	16.20	17.70	21.30	24.30
	R134a	3.72	4.50	5.22	7.92	9.48	10.83	10.62	12.78	14.61	15.96	19.20	21.93
T.X Valve	R404A	3S2	3S2	4S2	5S2	5S2	6S2	6S2	6S2	TE5-2	TE5-2	TE5-3	TE5-4
TE2-S / TE5	R407F	2X2	3X2	3X2	4X2	5X2	5X2	5X2	6X2	6X2	TE5-2	TE5-2	TE5-3
	R22	2X2	3X2	3X2	4X2	5X2	5X2	5X2	6X2	6X2	TE5-2	TE5-2	TE5-3
	R134a	3N2	4N2	4N2	6N2	TE5-1	TE5-1	TE5-1	TE5-2	TE5-2	TE5-3	TE5-3	TE5-4

LOW TEMP

MODELS	RLW	35	40	70	80	95	110	140	170
Capacity	R404A	3.42	4.26	7.20	8.37	9.51	11.16	14.19	16.95
kW @ 6 KTD	R407F	3.39	4.20	7.11	8.28	9.42	11.04	14.04	16.77
-24°C SST	R22	3.33	4.17	7.02	8.16	9.27	10.89	13.86	16.56
	R134a	2.91	3.63	6.12	7.11	8.07	9.48	12.06	14.40
T.X Valve	R404A	4S2	4S2	6S2	TE5-1	TE5-2	TE5-2	TE5-3	TE5-4
TE2-S / TE5	R407F	3X2	3X2	5X2	6X2	6X2	TE5-1	TE5-2	TE5-2
	R22	3X2	3X2	5X2	6X2	6X2	TE5-1	TE5-2	TE5-2
	R134a	4N2	5N2	TE5-1	TE5-1	TE5-2	TE5-2	TE5-3	TE5-4

DIMENSIONS

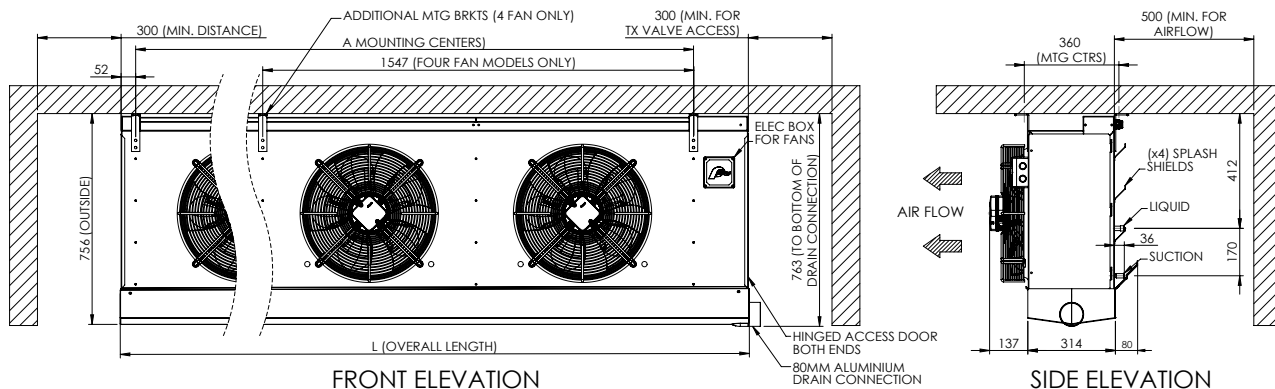

NTS (mm)

Accessories not shown

MEDIUM TEMP

MODELS	RMW	40	50	60	90	105	125	120	145	165	180	215	245
Air Throw	m	11.1	11.0	10.9	13.1	13.0	12.9	14.6	14.5	14.4	16.1	16.0	15.9
Air Volume	l/sec	1989	1931	1890	3978	3863	3781	5370	5214	5104	7956	7726	7562
Fan Motors	Ø 450mm	Num.	1	1	1	2	2	2	3	3	4	4	4
		Watts	490	490	490	980	980	980	1470	1470	1960	1960	1960
		Amps	2.36	2.36	2.36	4.72	4.72	4.72	7.08	7.08	9.44	9.44	9.44
Coil	Circuit Vol.	dm ³	4.46	4.46	4.46	8.92	8.92	8.92	11.94	11.94	17.91	17.91	17.91
	Connection	Dist Inlet	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	7/8"	7/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8"	1-1/8"	1-3/8"	1-3/8"	1-3/8"
		fpi	4	6	8	4	6	8	4	6	8	4	6
	Defrost	l/min	21.0	21.0	21.0	42.0	42.0	42.0	55.0	55.0	84.0	84.0	84.0
Dimensions	(Nom.)	min/hr int.	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8
Dimensions	L	1051	1051	1051	1813	1813	1813	2329	2329	2329	3349	3349	3349
	A	792	792	792	1554	1554	1554	2070	2070	2070	3090	3090	3090
Net Weight	kg	75	75	75	85	85	85	95	95	95	105	105	105

LOW TEMP

MODELS	RLW	35	40	70	80	95	110	140	170
Air Throw	m	11.1	11.0	13.1	13.0	14.6	14.5	16.1	16.0
Air Volume	l/sec	1790	1737	3580	3476	4833	4594	7160	6954
Fan Motors	Ø 450mm	Num.	1	1	2	2	3	4	4
		Watts	490	490	980	980	1470	1960	1960
		Amps	2.36	2.36	4.72	4.72	7.08	9.44	9.44
Coil	Circuit Vol.	dm ³	4.46	4.46	8.92	8.92	11.94	17.91	17.91
	Connection	Dist Inlet	1/2"	1/2"	5/8"	5/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	7/8"	7/8"	1-1/8"	1-3/8"	1-3/8"
		fpi	4	6	4	6	4	6	6
	Defrost	l/min	23.0	23.0	44.0	44.0	57.0	86.0	86.0
Dimensions	(Nom.)	min/hr int.	16/6	16/6	16/6	16/6	16/6	16/6	16/6
Dimensions	L	1051	1051	1813	1813	2329	2329	3349	3349
	A	792	792	1554	1554	2070	2070	3090	3090
Net Weight	kg	76	76	86	86	96	96	106	106

CAPACITY CORRECTION

RMW @ °C SST	RLW @ °C SST
5°	1.17
0°	1.07
-5°	0.99
-10°	0.93

RELATIVE HUMIDITY GUIDE

Temp Diff	R.H %	Temp Diff	R.H %
2K	94	10K	77
4K	89	12K	73
6K	84	14K	70
8K	81	16K	66

NOTES:

- Air throw based on CRMA standard @ 20°C
Multiply figures by 0.94 for 2°C and 0.87 for -18°C
- Fan motors 220-240V/1/50Hz

Specifications subject to change without notice

Commercial Unit Coolers



- Optimised 3/8" Rifle Bore Tube Coils
- Light Weight Alu Case - 'Signal White' Powder Coat
- High Airflow External Rotor Motors
- Turbo Heat Exchangers
- Water Defrost - Fully Serviceable

RW SERIES

3 25 kW


MEDIUM TEMP

MODELS	RMW	40	50	60	90	105	125	120	145	165	180	215	245
Capacity	R404A	4.20	5.13	5.94	8.97	10.77	12.27	12.03	14.52	16.56	18.06	21.75	24.84
kW @ 6 KTD -4°C SST	R407F	4.41	5.40	6.24	9.42	11.31	12.87	12.63	15.24	17.37	18.96	22.83	26.07
	R22	4.11	5.01	5.82	8.76	10.50	12.00	11.76	14.22	16.20	17.70	21.30	24.30
	R134a	3.72	4.50	5.22	7.92	9.48	10.83	10.62	12.78	14.61	15.96	19.20	21.93
T.X Valve	R404A	1SC	1-1/4SC	1-1/2SC	2SC	3-1/2SC	3-1/2SC	3-1/2SC	3-1/2SC	3-1/2SC	5SC	5SC	7SC
HFKE SC 	R407F	1HC	1-1/2HC	1-1/2HC	2HC	2-1/2HC	3HC	3HC	3HC	5-1/2HC	5-1/2HC	5-1/2HC	8HC
	R22	1HC	1-1/2HC	1-1/2HC	2HC	2-1/2HC	3HC	3HC	3HC	5-1/2HC	5-1/2HC	5-1/2HC	8HC
	R134a	1MC	1MC	1-1/2MC	1-3/4MC	2-1/2MC	2-1/2MC	2-1/2MC	4MC	4MC	4MC	6MC	6MC

LOW TEMP

MODELS	RLW	35	40	70	80	95	110	140	170
Capacity	R404A	3.42	4.26	7.20	8.37	9.51	11.16	14.19	16.95
kW @ 6 KTD -24°C SST	R407F	3.39	4.20	7.11	8.28	9.42	11.04	14.04	16.77
	R22	3.33	4.17	7.02	8.16	9.27	10.89	13.86	16.56
	R134a	2.91	3.63	6.12	7.11	8.07	9.48	12.06	14.40
T.X Valve	R404A	1-1/4SZ	1-1/4SZ	2SZ	3-1/2SZ	3-1/2SZ	3-1/2SZ	5SZ	5SZ
HFKE SC 	R407F	1HC	1-1/2HC	2HC	2-1/2HC	3HC	3HC	5-1/2HC	5-1/2HC
	R22	1HC	1-1/2HC	2HC	2-1/2HC	3HC	3HC	5-1/2HC	5-1/2HC
	R134a	1MC	1-1/2MC	2-1/2MC	2-1/2MC	4MC	4MC	4MC	6MC

DIMENSIONS

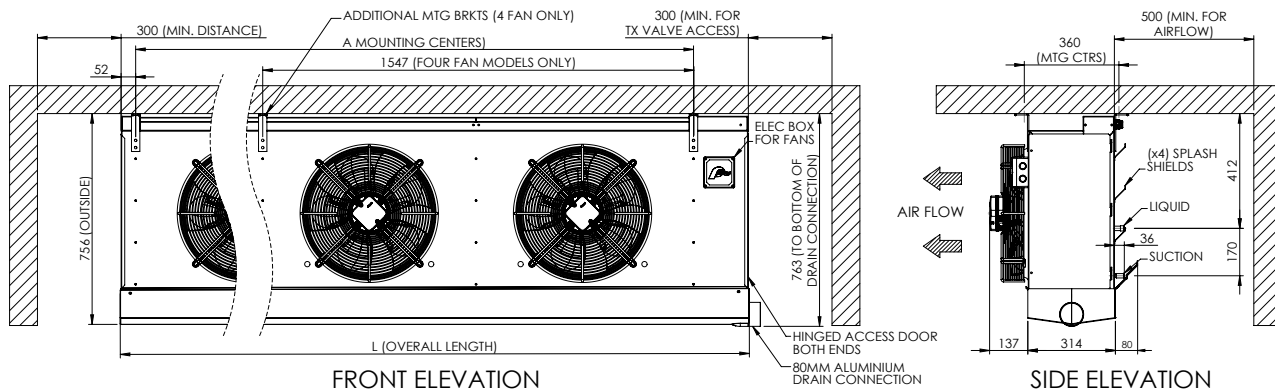

NTS (mm)

Accessories not shown

MEDIUM TEMP

MODELS	RMW	40	50	60	90	105	125	120	145	165	180	215	245
Air Throw	m	11.1	11.0	10.9	13.1	13.0	12.9	14.6	14.5	14.4	16.1	16.0	15.9
Air Volume	l/sec	1989	1931	1890	3978	3863	3781	5370	5214	5104	7956	7726	7562
Fan Motors	Ø 450mm	Num.	1	1	1	2	2	2	3	3	4	4	4
		Watts	490	490	490	980	980	980	1470	1470	1960	1960	1960
		Amps	2.36	2.36	2.36	4.72	4.72	4.72	7.08	7.08	9.44	9.44	9.44
Coil	Circuit Vol.	dm ³	4.46	4.46	4.46	8.92	8.92	8.92	11.94	11.94	17.91	17.91	17.91
	Connection	Dist Inlet	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	7/8"	7/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8"	1-1/8"	1-3/8"	1-3/8"	1-3/8"
		fpi	4	6	8	4	6	8	4	6	4	6	8
	Defrost	l/min	21.0	21.0	21.0	42.0	42.0	42.0	55.0	55.0	84.0	84.0	84.0
Dimensions	(Nom.)	min/hr int.	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8	12/8
	L	1051	1051	1051	1813	1813	1813	2329	2329	2329	3349	3349	3349
Net Weight	A	792	792	792	1554	1554	1554	2070	2070	2070	3090	3090	3090
	kg	75	75	75	85	85	85	95	95	95	105	105	105

LOW TEMP

MODELS	RLW	35	40	70	80	95	110	140	170
Air Throw	m	11.1	11.0	13.1	13.0	14.6	14.5	16.1	16.0
Air Volume	l/sec	1790	1737	3580	3476	4833	4594	7160	6954
Fan Motors	Ø 450mm	Num.	1	1	2	2	3	4	4
		Watts	490	490	980	980	1470	1960	1960
		Amps	2.36	2.36	4.72	4.72	7.08	9.44	9.44
Coil	Circuit Vol.	dm ³	4.46	4.46	8.92	8.92	11.94	17.91	17.91
	Connection	Dist Inlet	1/2"	1/2"	5/8"	5/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	7/8"	7/8"	1-1/8"	1-3/8"	1-3/8"
		fpi	4	6	4	6	4	4	6
	Defrost	l/min	23.0	23.0	44.0	44.0	57.0	86.0	86.0
Dimensions	(Nom.)	min/hr int.	16/6	16/6	16/6	16/6	16/6	16/6	16/6
	L	1051	1051	1813	1813	2329	2329	3349	3349
Net Weight	A	792	792	1554	1554	2070	2070	3090	3090
	kg	76	76	86	86	96	96	106	106

CAPACITY CORRECTION

RMW @ °C SST	RLW @ °C SST
5°	1.17
0°	1.07
-5°	0.99
-10°	0.93

RELATIVE HUMIDITY GUIDE

Temp Diff	R.H %	Temp Diff	R.H %
2K	94	10K	77
4K	89	12K	73
6K	84	14K	70
8K	81	16K	66

NOTES:

- Air throw based on CRMA standard @ 20°C
Multiply figures by 0.94 for 2°C and 0.87 for -18°C
- Fan motors 220-240V/1/50Hz

Specifications subject to change without notice